
Single Seat B120.09



Merri-bek single seats have two armrests per seat.

DESIGN STATEMENT

Single seat with backrest and two armrests provides seating option which is comfortable. It should be used where for limited space such as narrow footpath, or to be used as group seating using multiple single seats. The design is available with fixed and swivel option.

APPLICABLE LOCATION

Activity centres, bus shelter area, as specified.

COUNCIL STANDARD DRAWING

N/A

CROSS REFERENCE DOCUMENT

- N/A

STANDARD SPECIFICATION

Type: Single Seat (88641-GAL-FIXED-2ARM)

Slats Finish:

- Option 1 - Recycled composite timber 'Walnut' EnviroSlats
- Option 2 - Hardwood timber slats

Armrest & Legs: Cast aluminium frame with:

- Option A - Stainless steel finish for the arm rest and legs.
- Option B - For shopping strips, Black paint finish from 2-pack paint protective coatings such as Luxathane or similar.

Installation: In-ground fixings or bolted down as specified, to be used on a concrete footing. The location should be marked with chalk and confirmed with Council officers prior to permanent installation.

SUPPLIER

Furphy Foundry www.furphyfoundry.com.au or similar.

MAINTENANCE


Council Roads Unit: Hardwood located in outdoor areas should be initially recoated after 3 months, and every 6 months thereafter. Recoating should be done with coats of timber oil. For degraded surface which appears greying and checking, a light sanding is recommended to freshen up the timber.

Street Cleansing Unit: Remove graffiti when required with graffiti remover for timber slats, or rub with metal scourer for composite timber slats. Paint on metal can be recoated using similar paint after detergent degreasing and light abrasion.

GENERAL NOTES

1. Refer to manufacturer's installation manual

B120.09 Single Seat

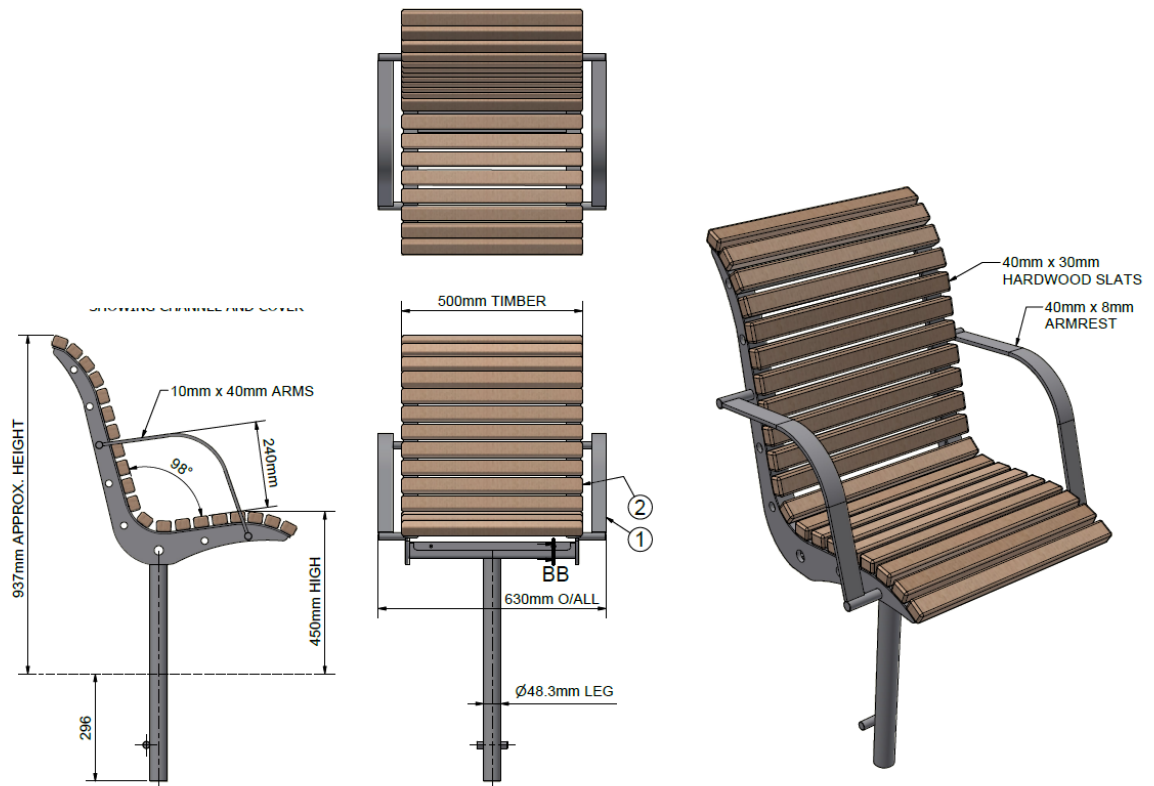

Copyright: Furphy Foundry