
Park Picnic Setting B120.06



DESIGN STATEMENT

The selected Park Picnic Setting has a classic design with a sturdy galvanised steel frame which can be arranged to allow for wheelchairs and push chairs to be positioned close to the table. Battens are either composite or timber battens, with composite battens being the preferred material for enduring appearance and reduced maintenance needs.

APPLICABLE LOCATIONS

Merri-bek open space including conservation areas, parks, playspaces and reserves.

COUNCIL STANDARD DRAWING

B120.06 Park Picnic Setting.

CROSS REFERENCE DOCUMENT

- B120.08 Park Platform Seat
- B120.04 Park Seat
- B120.05 Park Bench.

STANDARD SPECIFICATION

'Kingsville' style picnic setting.

Typical dimensions: L1800 x W1630 x H750mm.

Materials: hot dipped galvanised steel frame. For high profile parks and sportsgrounds the frame may be powdercoated black.

Battens: 40 x 30mm composite or stained hardwood.

Fixing: as detailed.

Positioning: Ensure there is a minimum of 100mm gap between the bench seat and table to allow sufficient space for average build people.

SUPPLIER

Urban Design Group or similar approved.

MAINTENANCE

Replace any damaged slats with new slats of same matching colour and material.

For timber battens which are greying, a light sanding is recommended to refresh the timber.

Ensure bolts are still holding seat in place.

A painted frame can be recoated using similar paint after detergent degreasing and light abrasion.


GENERAL NOTES

1. Recycled plastic Enviroslat or similar approved battens.

B120.06 Park Picnic Setting


Notes:

- Picnic setting from Urban Design Group or similar approved, product: 'Kingsville Picnic Setting.
- Furniture to be bolted down to concrete slab in preference to in-ground footings.
- Furniture to have composite slats with hot dipped galvanised steel frame. All fixtures to be hot dipped galvanised steel.
- Inspect furniture at delivery to ensure no obvious damage visible. If this is the case to advise the Superintendent immediately prior to installation.

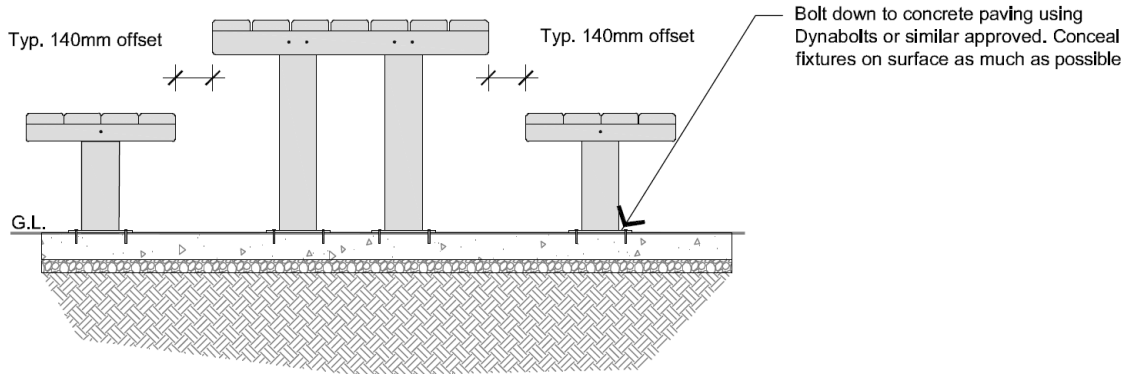

01 PARK PICNIC SETTING
Front Elevation 1:25

Picnic setting concrete slab to meet flush to adjacent finished levels

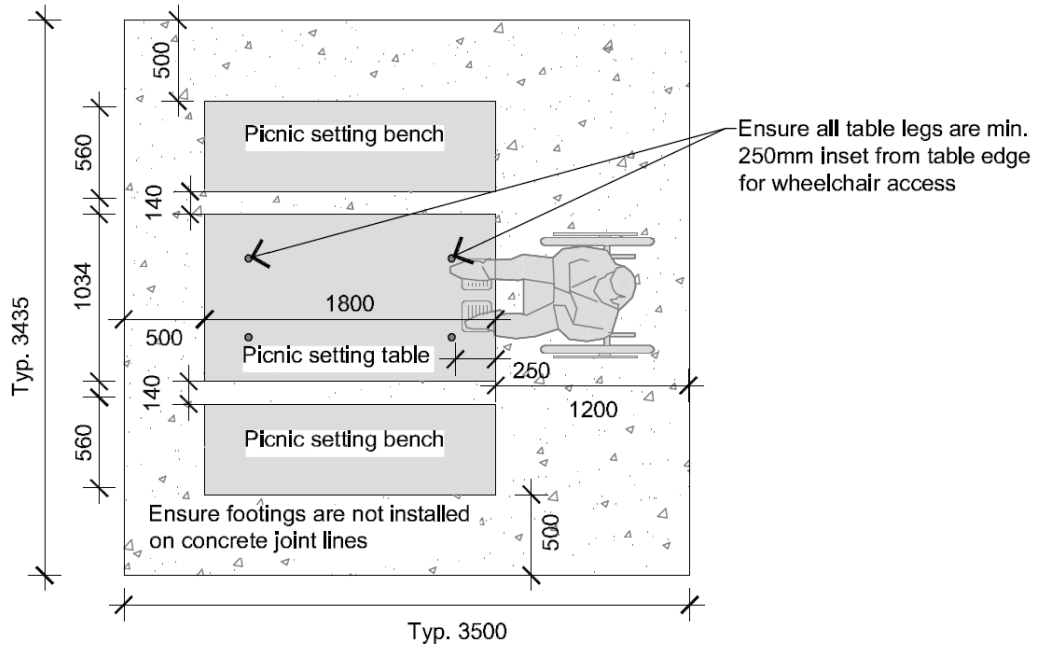

02 PARK PICNIC SETTING LAYOUT
Plan View 1:50